

# Model S122

## Bench Scale



- Low Cost, High Performance
- Weighing, Counting or Checkweighing
- Large, Easy to Read Display
- Battery or AC/DC Operation
- NTEP Certified— 150, 300, and 600 lb
- Portable

VALUE IN  
WEIGHING

# Model S122 Bench Scale

## Features

**Check Weighing**– Simple check weighing feature, with built in limit indicators of LOW, OK, and HIGH. Configurable Audio alarm settings. Target setting can be used for simple weighing or counting.

**Counting**– Simple counting feature using the Sample and Count keys with selectable sample sizes of 10, 20, 50, and 100 pieces. For accurate counting, minimum piece weight is suggested at 1/2 of a displayed division.

**Weight Accumulation and Totalizer**– Accumulates weight and number of transactions for multiple weighments

**Units Switching**– Switch between LB/KG or configure the scale for switching between KG or Grams, Pounds or Pounds/Ounce

**Tare**– Repeatable tare deduction feature

**Adjustable Indicator**– Adjustable to 90°, mounted via Column (35.5" H) or desktop

**Weight Platter**– Smooth stainless steel platform allows for easy clean-up

**Backlite**– One touch setting for turning on or off the backlite

**Perfect for Unstable Environments**– Adjustable AZT or Filter setting for high resolution applications and unstable applications

**Weight Hold**– Configurable weight hold setting

**High Resolution**– Configurable resolutions from 3,000 divisions (NTEP certified) to 10,000 divisions

## Specifications

### Capacity and Resolution–

150 x 0.05 lb

300 x 0.1 lb

600 x 0.2 lb

Resolutions shown above are NTEP certified at 3,000 divisions. Resolutions between 3,000 - 10,000 displayed divisions are configurable but not NTEP certified.

**Construction**– Die cast base, stainless steel weight platter, ABS indicator, aluminum column post

### Dimensions–

Scale base: 20.5" L x 16.5" W x 5" H

Scale base with Indicator: 20.5" L x 16.5" W x 37" H

**Display**– 7 Segment Backlite LCD, six 1" H digits

### Battery Life–

Rechargeable battery (included): up to 180 hours of continuous use

"D" cell batteries (not included): up to 480 hours of continuous use

**Operating Temperature**– 14° F to 104° F  
(-10° C to 40° C)

**Shipping Weight**– 45 lb

**Approvals**– NTEP CC# 05-040

### Dimensions

A = 20.47"

B = 16.55"

C = 5.0"


### Indicator

D = 10.94"

E = 8.03"

F = 6.85"

G = 36.61"

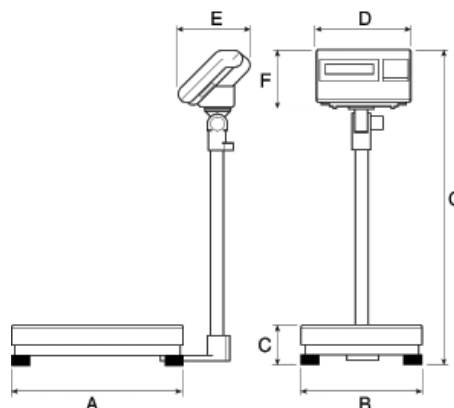

a division of Avery Weigh-Tronix, LLC

## Salter Brecknell Weighing Products

1000 Armstrong Dr., Fairmont, MN 56031  
Toll free: 800-637-0529, Tel: 507-238-8702  
Fax: 507-238-8271  
e-mail: sales@salterbrecknell.com  
www.salterbrecknell.com

